



DESCRIPTION

With a variety of trims shapes and baffles, the Endless series integrates seamlessly into ceilings and reduces glare. Choose from different light engine and beam angles to match your architectural space’s mood and style. Add a hex cell louver, a softening, or a linear spread lens to your fixture for the best optical performance.

LED Light Source

Luminus Generation 6 CXM-9 COB Arrays. High-efficacy white LED available in a wide range of color temperatures, with high color fidelity and gamut to enhance vivid colors.

Optics

TIR Lens collimate light into precisely controlled beam shapes ranging from 6° Very narrow spot to 60° wide flood.

Driver

Flicker free TRIAC/ELV or 0-10V Silicon Filled driver for maximum lifespan.

Heat Sink

Cold forged engine grade pin fin aluminum heat sink provides optimal heat management in a small package.

SPECIFICATIONS

Input Voltage: 120-277Vac, 50-60Hz
 Power Consumption: 18W x 2
 Total lumen output: 2488 lm @18W x 2
 Delivered lumen: 1866 lm @18W x 2
 CRI(Ra): >95 min
 R9: >70 min
 Dimming: TRIAC, ELV or 0-10V
 Power Factor: >0.9
 Lumen Maintenance: 70% @ 60,000 Hrs
 Approved location: IP20, Dry
 Tilt : 30°
 THD <20%
 Certification: cETLus

CRITICAL DIMENSIONS

Cut Out: 3"x5.75"
 Outer Diameter: 3.38"x6"
 Ceiling Clearance: 4.8"(18W) / 4 "(12W,8W)

ORDER INFORMATION

Model	Driver Output	Light Source ³	Beam Spread	Trim	Baffle finish
R932F -Fixed	8E -2 X 8W 200mA TRIAC/ELV	40T - 4000K, CRI>95	VN - 6°Very Narrow Spot ²	WH - White	WH - White
R932A -Adjustable	12E -2 X 12W 350mA TRIAC/ELV	35T - 3500K, CRI>95	NS - 16°Narrow Spot	BK - Black	BK - Black
	18E -2 x 18W 500mA TRIAC/ELV	30T - 3000K, CRI>95	SP - 25°Spot		C - Custom ³
	12V -2 x 12W 350mA 0-10V	27T - 2700K, CRI>95	FD - 45°Flood		
	18V -2 x 18W 500mA 0-10V	25T - 2500K, CRI>95	WF - 60°Wide Flood		
		30C - 3000K, CRI>90			
		DW - Dim to Warm ¹ (1800K-3000K)			

(Example:R932F-8E-30T-VN-WH-WH)

¹ Dim to warm only available with 12W ELV/Traic Dimming


² Very Narrow spot only available with 8W 30T ELV/Traic Dimming

³ Custom options available. Please consult factory.



Assembled in
Canada

DIMENSIONS

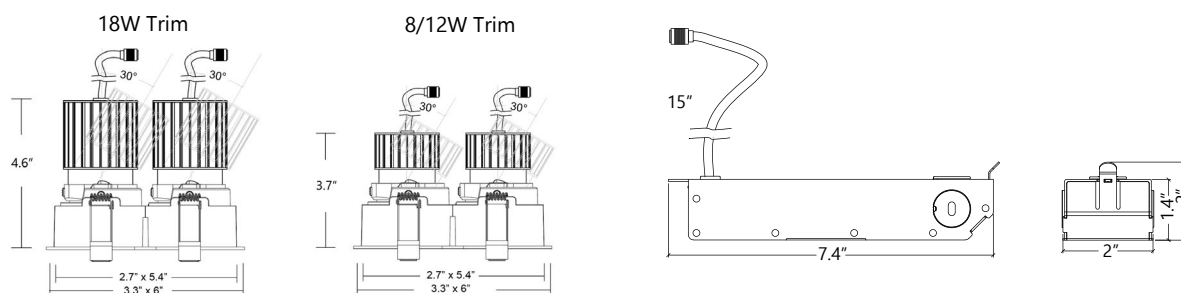

ACCESSORIES



HC01 - Honeycomb



OP01 - 1.5X Zoom




OP02 - 3X Zoom



OP03 - 1.5x5.0 Oval



OP04 - 1.5x6.0 Ova



RP - Rough-in Plate



EB-12W90M-ACV2
90min Emergency Battery Backup

Output Power: 12W (initial)
Emergency Operation: 90 minutes
Battery Type: nickel-cadmium
Input Voltage: 120-277 VAC
Output Voltage: 20-50 VDC
Class 2 Output: Yes
Diagnostic Type: Remote Control testing
Life Expectancy: 7-10 years
Mounting Type: Remote Inline (metal conduit)
Maximum Distance: 25 ft

LUMEN OUTPUT (per light engine)

Values fluctuate based on CCT and CRI. To estimate delivered lumen output of various CCT/CRI options, multiply nominal lumens by the multiplier below.

BEAM SPREAD	Multiplier	CODE	CCT	CRI	R9	20W 550mA	12W 350mA	8W 200mA
VN 6° Very Narrow Spot ¹	447lm	40T	4000	>95	>70	2488lm	1803lm	1051lm
NS 16° Narrow Spot	x0.85	35T	3500	>95	>70	2370lm	1765lm	1041lm
SP 25° Spot	x0.91	30T	3000	>95	>80	2377lm	1722lm	1017lm
FD 45° Flood	x0.88	27T	2700	>95	>80	2287lm	1657lm	979lm
WF 60° Wide Flood	x0.89	25T	2500	>95	>80	2120lm	1536lm	907lm
		30C	3000	>90	>90	1780lm	1293lm	768lm

¹ Very Narrow spot only available with 8W 30T ELV/Traic Dimming